

Advanced Technology  
SMART MONITORING



**AVEEN C 6.66**

Outdoor Fixed LED Display

# AVEEN C 6.66

## Outdoor Fixed LED Display



### Outdoor Fixed LED Display

- Outdoor LED Panels
- Light, Thin and Convenient; Easy delivery and installation:
- Panel thickness: 106mm, Panel weight: 21kg
- Front and Rear Servicing
- Waterproof Module
- Fully enclosed structure with rubber gasket and waterproof module seals off the electronic components from moisture.

### Light, Thin, Convenient

Panel thickness: 106mm. Saves installation space, Panel weight: 21kg. Easy delivery and installation.


### Waterproof Module

Fully enclosed structure with rubber gasket and waterproof module seals off the electronic components from moisture; Only 4 PCS screws allow for easy installation and disassembly.

### Advanced Technology **SMART MONITORING**

### Smart Module , Master Record

Smart module display the ID number, order number, production date, working time, module current, color oordinates, module voltage and module temperature.

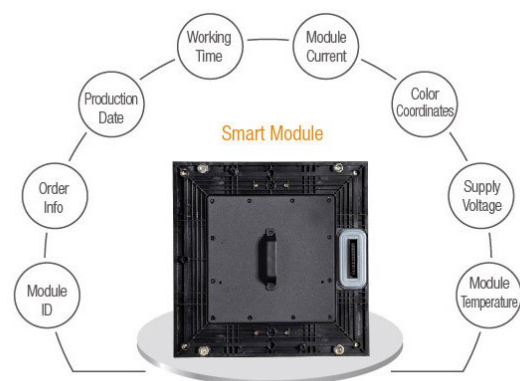


Aveen C6.66 smart module display the ID number, order number, production date, working time, module current, color oordinates, module voltage and module temperature.

## Specifications:


### General Specifications

### AVEEN C 6.66

<b>Model</b>	C 6.66
<b>LED Type</b>	SMD2727
<b>Pixel Pitch (mm)</b>	6.66
<b>Panel Dimensions (WxHxD)/(mm)</b>	640×960×106
<b>Pixel Per Panel</b>	96×144
<b>Panel Weight (kg)</b>	21
<b>Panel Material</b>	Aluminum
<b>Module Dimensions (WxH)/(mm)</b>	320×320
<b>Brightness (nit)</b>	6000
<b>Contrast Ratio</b>	5000:1
<b>Refresh Rate (Hz)</b>	1920
<b>Gray scale (bit)</b>	16
<b>Color Temperature (K)</b>	7500
<b>Viewing Angle (H/V) (°)</b>	140/120
<b>Driving Type</b>	1/6
<b>AC Operating Voltage (V)</b>	100~240
<b>Power Consumption (Max./Avg.)(W/m<sup>2</sup>)</b>	630/210
<b>Storage Temperature (°C)</b>	- 40~ + 60
<b>Operating Temperature (°C)</b>	- 20~ + 50
<b>Storage Humidity (RH)</b>	10 % ~90 %
<b>Operating Humidity (RH)</b>	10 % ~90 %
<b>IP Rating (Front/Rear)</b>	IP65/IP54
<b>LED Lifetime (H)</b>	100000
<b>Module Maintenance</b>	Front/Rear

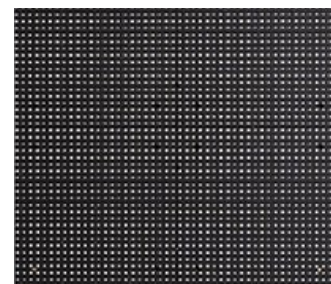

Panel

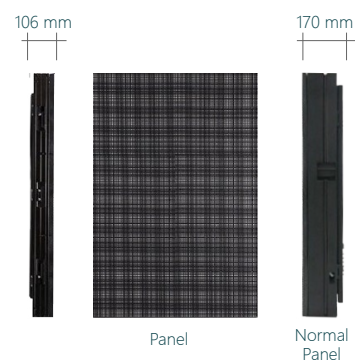

#### Head Quarters

Address : Keizersgracht 241, 1016 EA Amsterdam  
Tel # +31202612885

#### Contact:

Email : info@aveenbv.com  
: sales@aveenbv.com  
: support@aveenbv.com

