



Street Furniture

LED Display

AVEEN L 6.25

Outdoor Fixed LED Display

AVEEN L 6.25

Outdoor Fixed LED Display



Integrated Design

EASY TO USE

The best Advertising choice for the mobile Internet era.

- Managing multiple displays via cable, 3G, 4G, WAN and LAN
- Plug-in to use
- Floor and column installation
- Easy to transport & install
- Easy for maintenance
- Weatherproof 6.25 mm pixel pitch display

Real-time Monitoring, Everything Under Control

- Real-time receiving card, module, power, temperature monitoring
- Monitoring via PC, iPad, iPhone and Android



Integrated Design, Easy To Use

- Operation controller inside, ready to go
- Both Floor and column installation types possible
- Suitable for different environments



Floor installation



Column installation

- Sending Card
- Receiving Card
- Power Voltage
- Module
- Temperature
- Cable Fault



Specifications:

General Specifications **AVEEN L 6.5**

Model	L 6.25
LED Type	3535 3in1 SMD
Pixel Pitch (mm)	6.25
Panel Dimensions (WxHxD)/(mm)	1380x2350x280
Pixel Per Panel	200x280
Panel Weight (kg)	344
Panel Material	Aluminum Profile
Module Dimensions (LxWxH)/(mm)	250x250x11
Brightness (nit)	5500
Contrast Ratio	2800:1
Refresh Rate (Hz)	1920
Gray scale (bit)	16
Color Temperature (K)	7500
Viewing Angle (H/V) (°)	140/140
Driving Type	1/5
AC Operating Voltage (V)	100~240
Power Consumption (Max./Avg.)(W/m²)	700/230
Storage Temperature (°C)	- 40~ + 60
Operating Temperature (°C)	- 20~ + 50
Storage Humidity (RH)	10% ~90%
Operating Humidity (RH)	10% ~90%
IP Rating (Front/Rear)	IP54/IP54
LED Lifetime (H)	100000
Module Maintenance	Front

Easy To Maintain, Safe & Reliable



Front module maintenance




Built-in safety switch



Cylinder cooling fan



Wheels and supporting frame

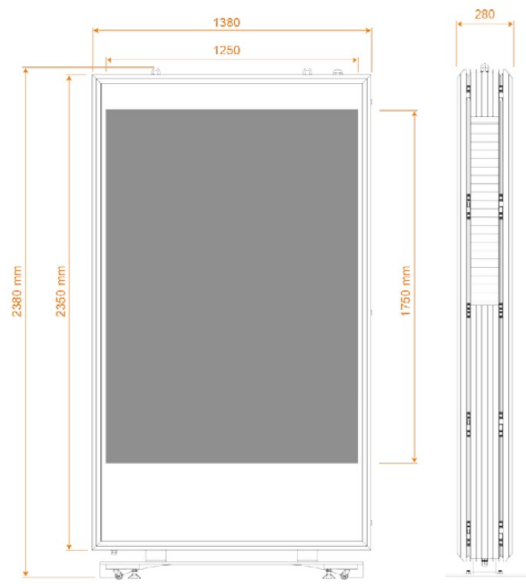

Head Quarters

Address : Keizersgracht 241, 1016 EA Amsterdam
Tel # +31202612885

Contact:

Email : info@aveenbv.com
: sales@aveenbv.com
: support@aveenbv.com

