



Professional Rental


HD LED Display

**AVEEN SPF 2.97**

Fine Pitch LED Display

# AVEEN SPF 2.97

## Fine Pitch LED Display



Professional Image


REPRESENTATION

### Indoor Fixed LED Display

- High refresh rate and High grayscale.
- High Display Performance
- High refresh rate, low brightness with high grayscale
- Easy and quick installation
- Easy and quick front maintenance

### Display Performance

No ghost images or banding problems, high refresh rate, low brightness with high grayscale, highlighting excellent display effect.


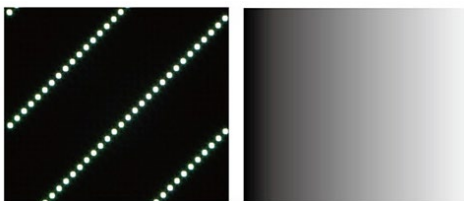


### Perfect supporting solution

Floor type supporter, rigging bar, trolley, etc. convenient the customer's storage,, transportation and installation.

### Smart Module

Module records including ID number, order info, production date, work time, etc. Mobile device monitoring via iOS or Android apps.

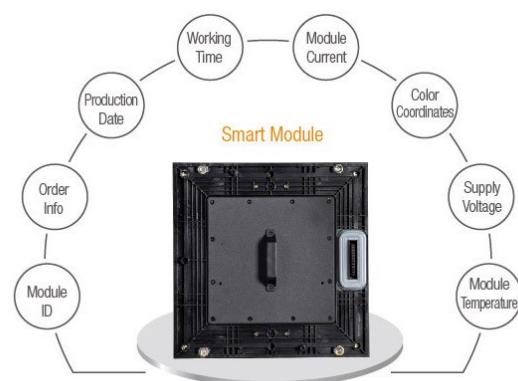

## Specifications:

### General Specifications

### AVEEN SPF 2.97

<b>Model</b>	SPF 2.97
<b>LED Type</b>	1515 black body 3in1 SMD
<b>Pixel Pitch (mm)</b>	2.97
<b>Panel Dimensions (WxHxD)/(mm)</b>	500×500×96
<b>Pixel Per Panel</b>	168×168
<b>Panel Weight (kg)</b>	8.5
<b>Panel Material</b>	Die casting magnesium alloys
<b>Module Dimensions (WxH)/(mm)</b>	250×250
<b>Brightness (nit)</b>	1000
<b>Refresh Rate (Hz)</b>	3840
<b>Gray scale (bit)</b>	14
<b>Viewing Angle (H/V) (°)</b>	160/140
<b>Driving Type</b>	1/14
<b>AC Operating Voltage (V)</b>	100~240
<b>Power Consumption (Max./Avg.)(W/m<sup>2</sup>)</b>	615/205
<b>Storage Temperature (°C)</b>	—20~+50
<b>Operating Temperature (°C)</b>	—10~+40
<b>Storage Humidity (RH)</b>	10% ~90%
<b>Operating Humidity (RH)</b>	10% ~90%
<b>IP Rating (Front/Rear)</b>	IP40/IP21
<b>LED Lifetime (H)</b>	100000
<b>Module Maintenance</b>	Front

Convenient and rapid module maintenance



#### Head Quarters

Address : Keizersgracht 241, 1016 EA Amsterdam  
Tel # +31202612885

#### Contact:

Email : info@aveenbv.com  
: sales@aveenbv.com  
: support@aveenbv.com